


CEILING LOUDSPEAKERS

# EVAC Voice Evacuation Ceiling Loudspeakers


Metal ceiling loudspeakers with built-in 100V transformer. Steel grill and fire dome. Designed for easy mounting in to false ceilings

## EVAC 50X


Designed to be installed in false ceilings or panels. EVAC 50X is perfect for use in a voice alarm role, for clear and intelligible speech reproduction as well as background music. In compliance with EN 54-24 standard, EVAC 50X is equipped with ceramic terminal and thermal fuse.

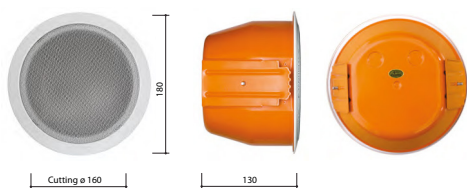


HORIZONTAL / VERTICAL POLAR DIAGRAMS

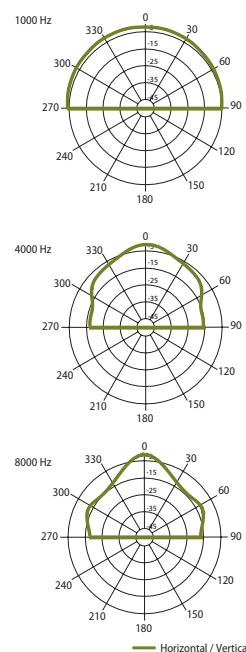

FREQUENCY RESPONSE

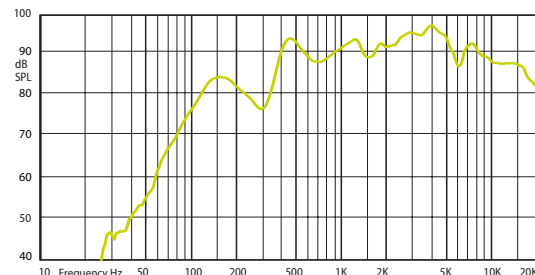

IMPEDANCE

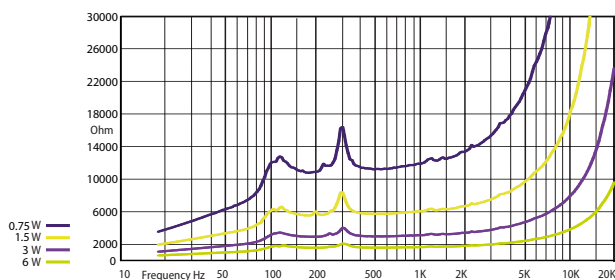

Technical Specifications		EVAC 50X
Rated power		6 W
Transformer power taps		6 W - 3 W - 1,5 W - 0,75 W - 0,25 W
Sensitivity		92 dB (1 W/1 m)
Maximum SPL		104 dB (Pmax/1 m) at 3651 Hz
Frequency response		150 Hz – 18 kHz
Dispersion at 1000 Hz		180° conical
Driver dimensions		5" (127 mm)
Dimensions		ø 180 mm x 130 mm
Weight		1,32 kg
Material		Steel
Colour		Speaker - white (RAL 9016), fire dome - orange (RAL 2008)