

CEILING LOUDSPEAKERS

PC Plastic Ceiling Loudspeakers

ABS plastic ceiling loudspeakers with built-in 100V transformer.



PC 5T & PC 8T

These units provide an excellent full range of clear sound reproduction. Used where a combination of high quality background music and public address is required. The loudspeakers are designed to be quickly and simply installed into false ceilings and are equipped with coaxial speakers for improved sound quality.


PC 5T




HORIZONTAL / VERTICAL POLAR DIAGRAMS

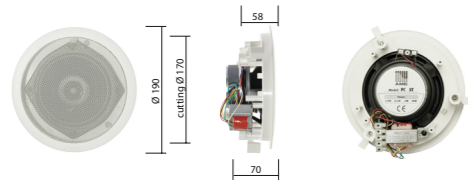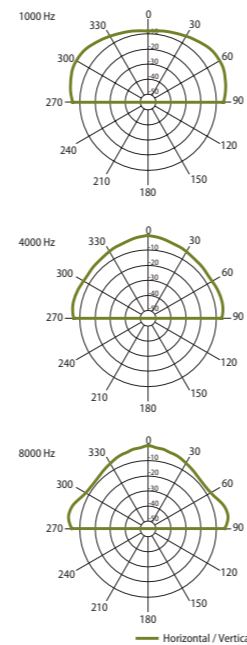

FREQUENCY RESPONSE

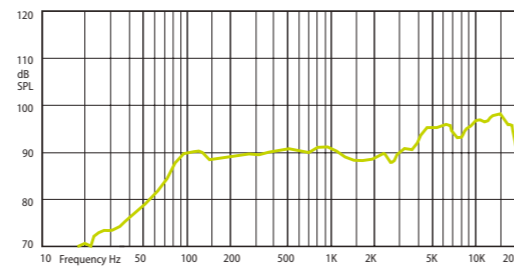

IMPEDANCE


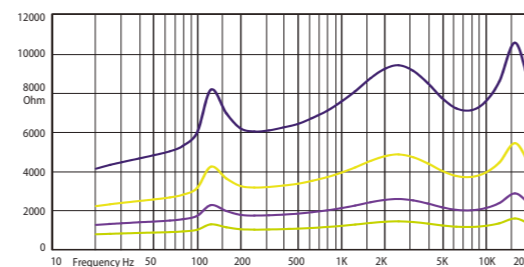


| Technical Specifications | PC 5T |
|--------------------------|---|
| Rated power | 10 W |
| Transformer power taps | 10 W - 5 W - 2,5 W - 1,25 W |
| Sensitivity | 88 dB (1 W/1 m) |
| Maximum SPL | 98 dB (Pmax/1 m) at 15694 Hz |
| Frequency response | 90 Hz – 20 kHz |
| Dispersion at 1000 Hz | 120° conical |
| Driver dimensions | 5" (130 mm) woofer, 0,5" (13 mm) tweeter, coaxial |
| Dimensions | ø 190 mm × 70 mm |
| Weight | 1,1 kg |
| Material | Plastic, Steel grill |
| Colour | White (RAL 9016) |


PC 8T




HORIZONTAL / VERTICAL POLAR DIAGRAMS

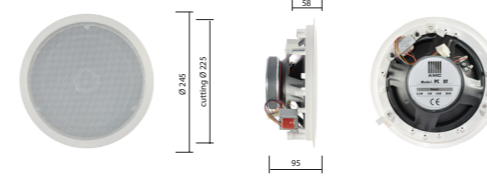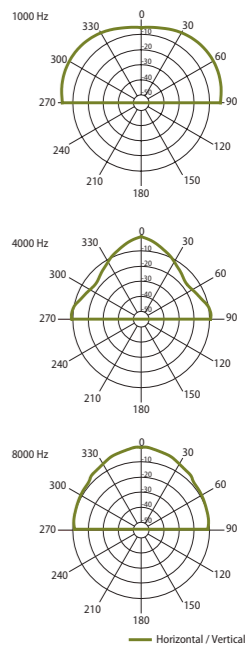

FREQUENCY RESPONSE

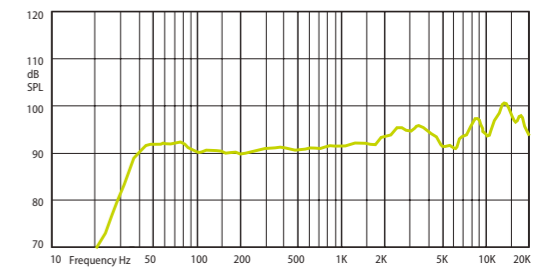

IMPEDANCE

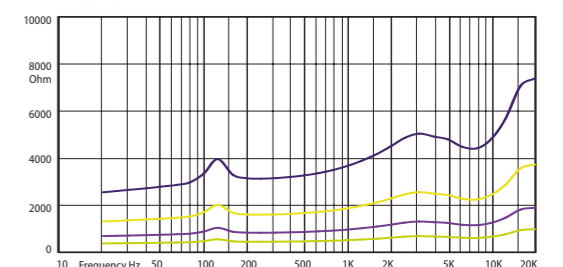

| Technical Specifications | PC 8T |
|--------------------------|---|
| Rated power | 20 W |
| Transformer power taps | 20 W - 10 W - 5 W - 2,5 W |
| Sensitivity | 88 dB (1 W/1 m) |
| Maximum SPL | 101 dB (Pmax/1 m) at 15249 Hz |
| Frequency response | 80 Hz – 20 kHz |
| Dispersion at 1000 Hz | 120° conical |
| Driver dimensions | 8" (200 mm) woofer, 0,5" (13 mm) tweeter, coaxial |
| Dimensions | ø 245 mm × 95 mm |
| Weight | 2,1 kg |
| Material | Plastic, Steel grill |
| Colour | White (RAL 9016) |