

CS9134/CS9138

4/8-Port PS/2 KVM Switch



Despite the CS-9134 and the CS-9138 (PS/2 and USB compatible*) serving as cascade units for the CS-428 Multi-Console KVM Switch, they also function as capable units by themselves. A single Master View CS-9134 or CS-9138 can control up to 4 or 8 computers, respectively. Since units can be cascaded to three levels, in a full three stage installation, up to 21 CS-9134 Master Views can control up to 64 computers, and up to 73 CS-9138 Master Views can control up to 512 computers - all from a single console. There is no better way to save time and money than with a Master View CS-9134/CS-9138 installation.

* USB operation requires purchase of optional equipment (see Optional Equipment below).


Features

- One PS/2 console controls 4 or 8 computers
- Cascadable up to 3 levels - provides up to 64 or 512 computers.
- Computer selection via front panel pushbuttons, hotkeys or On Screen Display (OSD).
- Keyboard and mouse emulation for error free booting
- Supports Microsoft IntelliMouse, Logitech MouseMan, FirstMouse, IBM Scrollpoint Mouse
- OSD automatically adjusts to resolution changes.
- Auto Scan function to monitor computer operation
- Superior video quality: up to 1920 x 1440; DDC2B
- Available in silver and black
- Special design for easy stacking
- Rack mountable in 19" (1U) system rack.

Specifications

Function		CS-9134	CS-9138	
Computer Connections	Direct	4	8	
	Max	64 (Via Cascade)	512 (Via Cascade)	
Computer Port Selection		Hotkey, Pushbutton, OSD		
Connectors	Console	Keyboard	1 x Mini Din 6 Female (Purple)	
		Video	1 x HDB15 Female (Blue)	
		Mouse	1 x Mini Din 6 Female (Green)	
	Computer	Keyboard	4 x Mini Din 6 Female (Purple)	8 x Mini Din 6 Female (Purple)
		Video	4 x HDB15 Male (Blue)	8 x HDB15 Male (Blue)
		Mouse	4 x Mini Din 6 Female (Green)	8 x Mini Din 6 Female (Green)
Power	1 (Spare) x DC Jack (Black)			
LEDs	On Line/ Selected	4 (Green) / 4(Orange)	8 (Green) / 8(Orange)	
	Power	1 (Blue)		
Emulation	Keyboard	PS/2		
	Mouse	PS/2		
Video		1920 x 1440; DDC2B		
Scan Interval		3, 5, 10, 15, 20, 30, 40, 60 Seconds		
Power Consumption		DC9V, 0.9W	DC9V, 1.08W	
Environment	Operating Temperature	0°~50°C		
	Storage Temperature	-20°~60°C		
	Humidity	0~80% RH, NC		
Physical Properties	Housing	Metal		
	Weight	2.55 kg	2.85 kg	
	Dimensions (L x W x H)	45 x 17 x 6.7 cm		

Diagram (CS-9138)

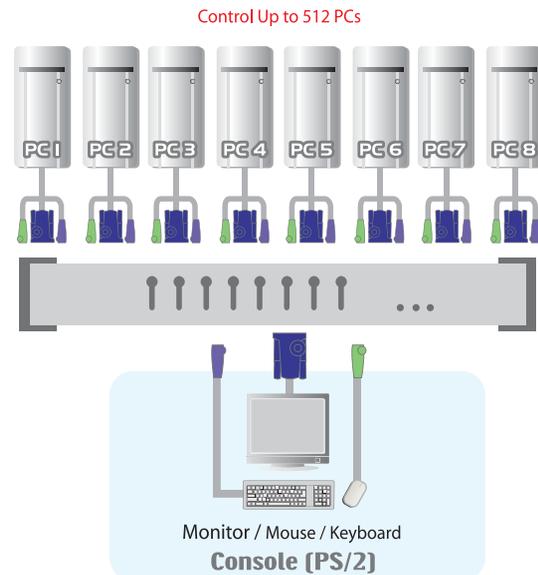

Accessories



1. Rack Mount Kit x 1 (pic.1)
2. Power Adapter: DC9V x 1 (pic.2)

Optional Equipment

- **PS/2 KVM Cable:**
We offer varying lengths: 1.2m (2L-5001 P/C), or 1.8m (2L-5002 P/C) 3m (2L-5003 P/C) and 5m (2L-5005 P/C) PS/2 KVM cable, please refer to page P67-A
- **Cables & Converters for USB interface support:**
 1. **PC compatible:** a 1.8m (2L-5502UP), 3m (2L5503UP) and 6m (2L-5506UP) USB KVM cable, please refer to page P67-G
 2. **Windows/Mac compatible:** UC-100 KMA (PS/2 to USB Adapter), please refer to page P35
 3. **Sun (USB) :** CV-131B, see page P34, **SUN (Legacy):** CV-130B, see page P33



ATEN North America



ATEN Technology
19641 Da Vinci, Foothill Ranch, CA 92610
Phone: 888.999.ATEN (2836) Fax: 949.428.1100

ATEN New Jersey - SIVAR Division
155 Pierce Street, Somerset, NJ 08873
Phone: 888.999.ATEN (2836) ext. 2300 Fax: 732.356.1639

Email: sales@aten-usa.com

Website: www.aten-usa.com

