



EN54-24:2008
1438 - CPR - 0412


TYPE A

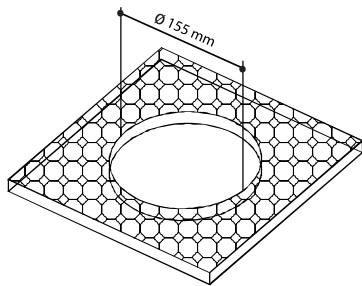

1) Cut the 155 mm diameter hole in the ceiling.

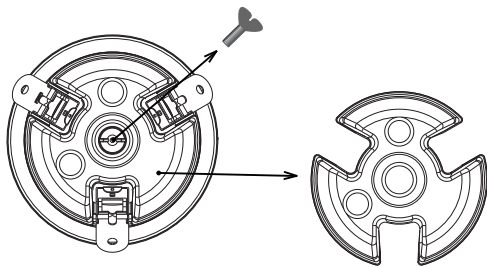


2) Unscrew bolt and remove dome.

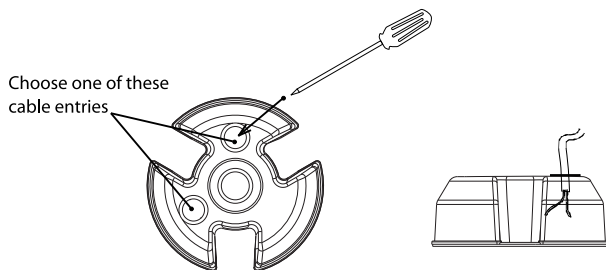


Choose one of these cable entries

3) Make the small hole by using awl in the rubber seal and pass through it the cable.

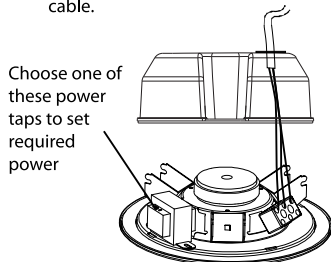


Choose one of these power taps to set required power



4) Connect cable with ceramic terminal and set required power output on the line transformer.

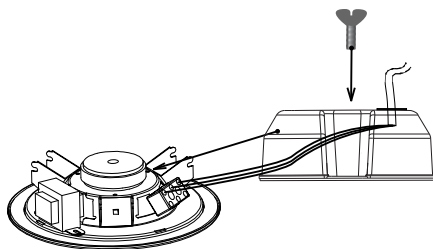


5) Place the dome on the loudspeaker and fix it with the screw.

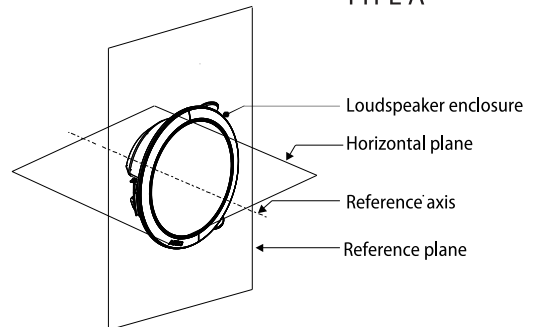


MC 4EN Circuit diagram

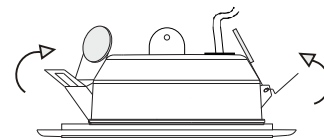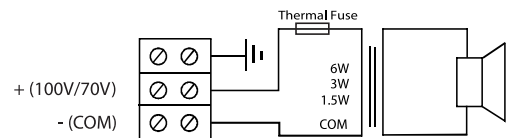

6) Lift all speaker's mounting clamps.

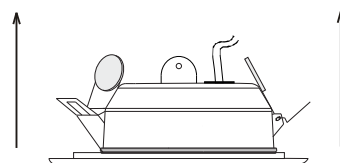

7) Carefully push loudspeaker into the hole, until the springs fix it.

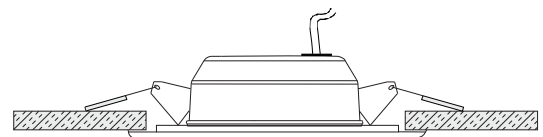

Picture: mounted loudspeaker