




NovoDisplay DK series

All-in-One Professional Display
Digital Signage & Wireless Collaboration

Overview

The NovoDisplay DK4 series is an Ultra HD 4K large display solution for business digital signage that supports both landscape and portrait display modes. With built-in Digital Signage and Wireless Collaboration, NovoDisplay can easily publish digital signage content or switch to presentation mode for sharing your screen anytime. This series is available for various display sizes, suitable for commercial applications such as hospitality, retail, education and business.

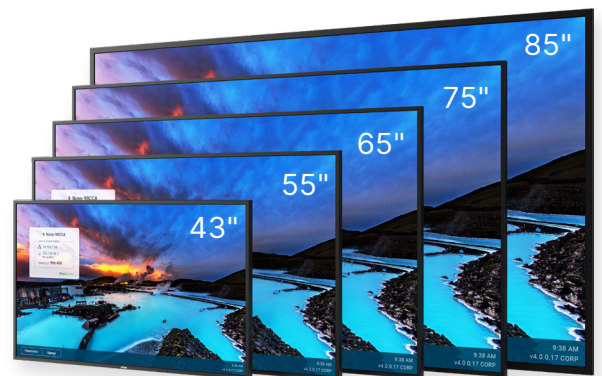

NovoDisplay DK434, DK554, DK654, DK754, DK854



Departures

10:45
2023/09/07

Time	Destination	Flight	Gate	Status
12:00	Hong-Kong	HK1701	A50	Boarding
12:05	London	HT965	D15	Delayed
12:15	New York	HK3702	B36	Boarding
12:20	Amsterdam	HK686	C11	Cancelled
12:25	Buenos Aires	BA2670	B6	Boarding
12:25	Dusseldorf	DS2305	E5	Boarding
12:30	Oslo	OS158	B18	Boarding
12:40	Dubai	DB1236	C32	Boarding
13:10	Bologna	BL9870	A6	Boarding



Key Features

Digital Signage



The built-in digital signage solution is easy to set up and manage via the optional NovoDS Cloud service or included NovoDS Studio software.

The user can toggle between the Wireless Collaboration and Digital Signage function to maximise the use of the display at any time.



Exceptional visual performance




With 4K-UHD resolution, a wide viewing angle, high brightness, anti-glare screen, and an ultra-narrow bezel, the DK Series delivers clear, vivid visuals and an immersive viewing experience from any angle.



NovoDS Cloud



A cloud-based platform for managing NovoDS devices and content anytime, anywhere - with role-based access, interactive widgets, and ready-to-use design templates.

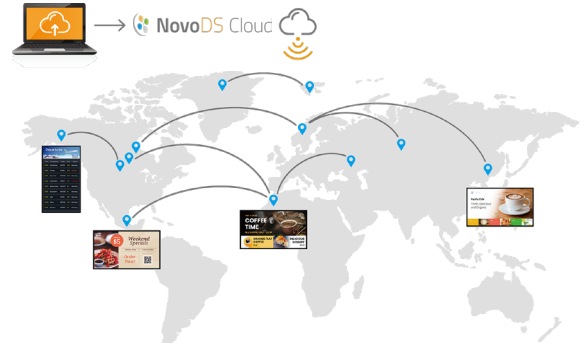

Support Landscape & Portrait Installation



The DK series easy to install and can support landscape and portrait mode to cater for various business needs.



Wireless Presentation



The DK series has built-in NovoConnect for cable-free and hassle-free presentations and collaboration in the classroom or in office.



Remote Manager Cloud



- Cloud-base Device Management
- Firmware update
- Remote assist – View and click on the device screen in the cloud
- Managing devices by groups



Product Specifications

Model		DK434	DK554	DK654	DK754	DK854	
Display	Type/Technology	Backlit LED (IPS Panel)					
	Panel Size	43"	55"	65"	75"	85"	
	Type/Technology	Backlit D-LED					
	Brightness (Typ)	500 cd/m2					
	Native Resolution	4K Ultra-HD (3840 x 2160)					
	Viewing Angle (H/V)	178° / 178°					
	Haze Value	25%					
	Aspect Ratio	16:9					
	Response Time (MS)	6 ms					
	Estimated Life Time (Typ.)	50,000 Hours					
	Display Color (Bit)	1.07 billion (10-bit)					
	Daily Operation (Hours/Days)	24/7				16/7	
	Bezel Even	Yes					
	Connectivity	Input	HDMI v2.0(ARC, HDCP v2.2) x2, Audio-In (3.5mm) x1 RS-232 (RJ45) x1				
Output		HDMI-Out x1 4K@60Hz, USB-A x2, Audio-Out (3.5mm) x1, RS-232 x1, RJ45 x1					
Wireless		WiFi 6 802.11a/b/g/n/ac/ax / Bluetooth v5.2					
OPS Interface		Standard 80pin Compliant (Except DK854)					
IR Receiver (Front)		x1 (±25° Angle, >8m Distance)					
System		OS	Android™ v14.0				
		Storage	Internal: 32GB eMMC Flash (About 25GB User Availability)				
Digital Signage	Supported Widget	Announcement Mode, Agenda, Social Networks, Weather, Calendar, Clocks, HTML 5 Rendering, Remote Media					
	Video decoding	Single 4K@60fps					
Wireless Collaboration	BYOD Supported	Windows 7 / 8 / 10 (32 bits and 64 bits), macOS 10.7 and above, Ubuntu, iOS 7.0 (Airplay) and above, Android 4.0 (Google Cast) and above, Chromebook					
	Simultaneous Connections	NovoConnect - 64 connections / 4-split screen					
Speaker	Internal	10 x2 (Stereo)					
Power	Power Supply (Internal)	AC 100-240V, 50/60Hz					
	Consumption (without OPS)	≤120W	≤170W	≤190W	≤240W	≤300W	
	Standby Mode	<0.5W (Standby)					
Physical Characteristics	Dimension (L x H x D) mm	971.6 x 560 x 70	1,238.4 x 830 x 144	1457.7 x 832.4 x 68.8	1457.7 x 832.4 x 68.8	1915.6 x 1096.8 x 100.7	
	Weight (Kg)	Net	8kg	13kg	17.7kg	27.7kg	41.9kg
		Gross	11.5kg	18.5kg	27.4kg	38.1kg	55.5kg
	VESA Mounting (FPMPMI)	4 - M6*18mm, 400 x 400mm		4 - M8*16mm, 500 x 500mm			
Frame Color	Black						
Accessories	Standard	AC Power Cord(2m, x1), QSG,HDMI Cable(1.8m,x1), Remote Control, Mounting Kit,					
	Optional	NovoDS Cloud License, OPS (80-pin), Launchers					
Warranty	Standard	3 years warranty					

www.vivitek.eu | www.novoconnect.eu

©2025 Vivitek. Vivitek is a trademark of Delta Electronics, Inc. Other trademarks are the properties of their respective owners. Values, weights and dimensions shown are approximate. Errors and omissions accepted. Specifications are subject to change without prior notice.
Reference number: 0906/2025