

CEILING LOUDSPEAKERS

EVAC Voice Evacuation Loudspeaker EN54-24 Certified

Metal ceiling loudspeakers with built-in 100V transformer, ceramic terminal, thermal fuse, steel grill and steel fire dome certified according to EN54-24 standard.




EVAC 5EN

EVAC 5EN voice evacuation loudspeakers designed for use in a voice alarm applications for clear and intelligible voice announcements and background music. The loudspeakers are equipped with ceramic terminal and thermal fuse and conforms to high quality requirements of EN54-24 standard. Steel housing and metal grill prevents the fire spreading in to the ceiling. Ceramic terminal and thermal fuse ensures faultless operation in the case of emergency situation.

Speakers are certified by Intertek.




HORIZONTAL / VERTICAL POLAR DIAGRAM




— Horizontal / Vertical

FREQUENCY RESPONSE

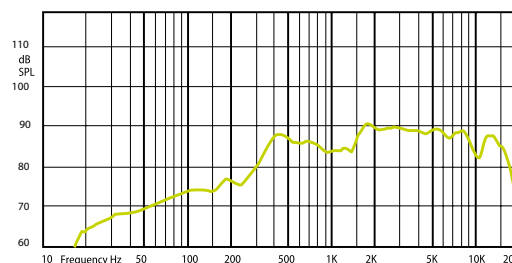

IMPEDANCE

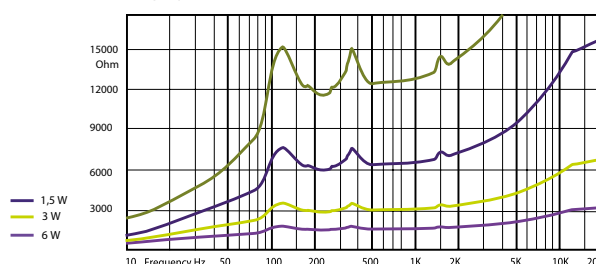

Technical Specifications	EVAC 5EN
Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5 W - 0,75 W - 0,25 W
Sensitivity	87 dB (1W / 1m)
Maximum SPL	95 dB (Pmax / 1m) at 1 kHz
Frequency response	180 Hz - 17,5 kHz
Dispersion at 1000 Hz	180 ° conical
Driver dimensions	5" (127 mm)
Dimensions	ø 190 mm x 94 mm
Weight	1,1 kg
Material	Steel
Colour	White (RAL 9016)